



■ Features:

- Universal AC input/Full range (upto 305VAC)
- Built-in active PFC function
- Protections: Short circuit/Overcurrent/Overvoltage/Overtemperature
- Cooling by free air convection
- OCP point adjustable throughout output cable or internal potentiometer
- IP67/IP65 design for indoor or outdoor installations
- "UL8750 listed" safety approved for HLG-80H- ☐ BL
- Class 2 power unit
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and moving sign applications
- Compliant to world wide safety regulations for lighting
- Suitable for dry/damp/wet locations
- 5 years warranty (Note. 10)

HLG-80H-12 **A** Blank:IP67rated.CableforI/Oconnection.

A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.

B: IP67 rated. Constant current level adjustable throughout output cable with 1~10Vdc or 10V PWM signal or resistance.

BL (option) : Contact MEANWELL for details.

D (option): IP67 rated. Timer dimming function, contact MEANWELL for details.

SPECIFICATION


SPECIFICATION											
MODEL		HLG-80H-12	HLG-80H-15	HLG-80H-20	HLG-80H-24	HLG-80H-30	HLG-80H-36	HLG-80H-42	HLG-80H-48	HLG-80H-54	
OUTPUT	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V	
	CONSTANT CURRENT REGION	7.2 ~ 12V	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V	
	RATED CURRENT	5A	5A	4A	3.4A	2.7A	2.3A	1.95A	1.7A	1.5A	
	RATED POWER	60W	75W	80W	81.6W	81W	82.8W	81.9W	81.6W	81W	
	RIPPLE & NOISE (max.)	Note.2 150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	
	VOLTAGEADJ. RANGE	Note.6 10.8 ~ 13.5V	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V	
	CURRENTADJ. RANGE	Can be adjusted by internal potentiometerAtype only									
		3 ~ 5A	3 ~ 5A	2.4 ~ 4A	2.04 ~ 3.4A	1.62 ~ 2.7A	1.38 ~ 2.3A	1.17 ~ 1.95A	1.02 ~ 1.7A	0.9 ~ 1.5A	
	VOLTAGE TOLERANCE	Note.3 ±2.5%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	
INPUT	LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	
	SETUP, RISE TIME	Note.8 1200ms.80ms/115VAC	500ms.80ms/230VAC at full load ; B type 1200ms.200ms/115VAC 500ms.200ms/230VAC at 95% load								
	HOLD UPTIME (Typ.)	16ms at full load	230VAC /115VAC								
	VOLTAGE RANGE	Note.5 90 ~ 305VAC	127 ~ 431VDC								
	FREQUENCYRANGE	47 ~ 63Hz									
	POWER FACTOR (Typ.)	PF>0.96/115VAC, PF>0.96/230VAC, PF>0.94/277VAC at full load (Please refer to "Power Factor Characteristic" curve)									
	TOTALHARMONIC DISTORTION	THD< 20% when output loading60% at 115VAC/230VAC input and output loading75% at 277VAC input									
	EFFICIENCY(Typ.)	88%	89%	90%	90.5%	91%	91%	91%	91%	91%	
	AC CURRENT (Typ.)	0.85A/ 115VAC		0.425A/ 230VAC		0.4A/ 277VAC					
	INRUSH CURRENT (Typ.)	COLD START70A(twidth=485s)measured at 50% Ipeak) at 230VAC									
PROTECTION	LEAKAGE CURRENT	<0.75mA/ 277VAC									
	OVER CURRENT	Note.4 95 ~ 108%									
		Protection type : Constant current limiting, recovers automatically after fault condition is removed									
	SHORT CIRCUIT	Hiccupmode,recoversautomaticallyafterfaultconditionisremoved									
		14 ~ 17V	18 ~ 24V	23 ~ 30V	28 ~ 35V	35 ~ 43V	41 ~ 49V	48 ~ 58V	54 ~ 63V	59 ~ 68V	
	OVER VOLTAGE	Protection type :Shut down o/p voltage, re-power on to recover									
ENVIRONMENT	OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover									
	WORKING TEMP.	-40 ~ +70℃ (Refer to "Derating Curve")									
	WORKING HUMIDITY	20 ~ 95% RH non-condensing									
	STORAGE TEMP., HUMIDITY	-40 ~ +80℃, 10 ~ 95% RH									
	TEMP. COEFFICIENT	±0.3%/ (0 ~ 60)									
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X,Y, Z axes									
SAFETY& EMC	SAFETYSTANDARDS	Note.7	UL8750, CSAC22.2 No. 250.0-08(except for HLG-80H-48/54V & HLG-80H-48/54BL), UL8750 listed for HLG-80H- BL								
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC									
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25 °C/ 70% RH									
	EMC EMISSION	Compliance to EN55015, EN61000-3-2 Class C (≥60% load) ; EN61000-3-3									
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge 4KV), criteriaA									
OTHERS	MTBF	357.8Khrs min. MIL-HDBK-217F (25 °C)									
	DIMENSION	195.6*61.5*38.8mm (L*W*H)									
	PACKING	0.84Kg; 16pcs/14.4Kg/0.54CUFT									
NOTE	1.All parametersNOTspeciallymentionedaremeasuredat230VACinput,ratedloadand25 °C ofambienttemperature. 2.Ripple&noisearemeasuredat20MHzofbandwidthbyusinga12"twistedpair-wireterminatedwitha0.1uf&47ufparallel capacitor. 3.Tolerance:includessetuptolerance,lineregulationandloadregulation. 4.Pleaserefer to"DRIVINGMETHODSOFLEDMODULE". 5.Deratingmaybeneededunderlowinputvoltages.Pleascheckthestaticcharacteristicsformoredetails. 6.Atypeonly. 7.SafetyandEMCdesignrefer toEN60598-1,CNS15233,GB7000.1,FCCpart18. 8.Lengthofsetuptimeismeasuredatcoldfirststart.TurningON/OFFthepowersupplymayleadtoincreaseofthesetuptime. 9.Thepowersupplyisconsideredasacomponentthatwill beoperatedincombinationwithfinal equipment.SinceEMCperformancewill be affectedbythecompleteinstallation,thefinal equipmentmanufacturersmustre-qualifyEMCDirectiveonthecompleteinstallationagain. 10.Refertowarrantystatement. 11.Tofulfill requirementsofthelatestErPregulationforlightingfixtures,thisLEDpowersupplycanonlybeusedbehindaswitchwithout permanentlyconnectedtothemains.										

Mechanical Specification

Case No.997A


Unit:mm

Blank:(HLG-80H)

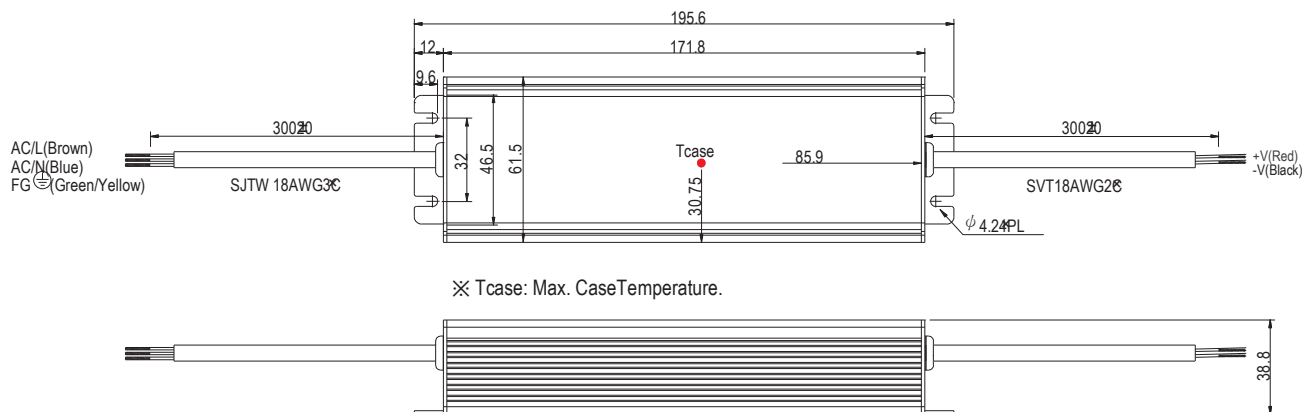


※IP67 rated. Cable for I/O connection.

A Type:(HLG-80H-_A)

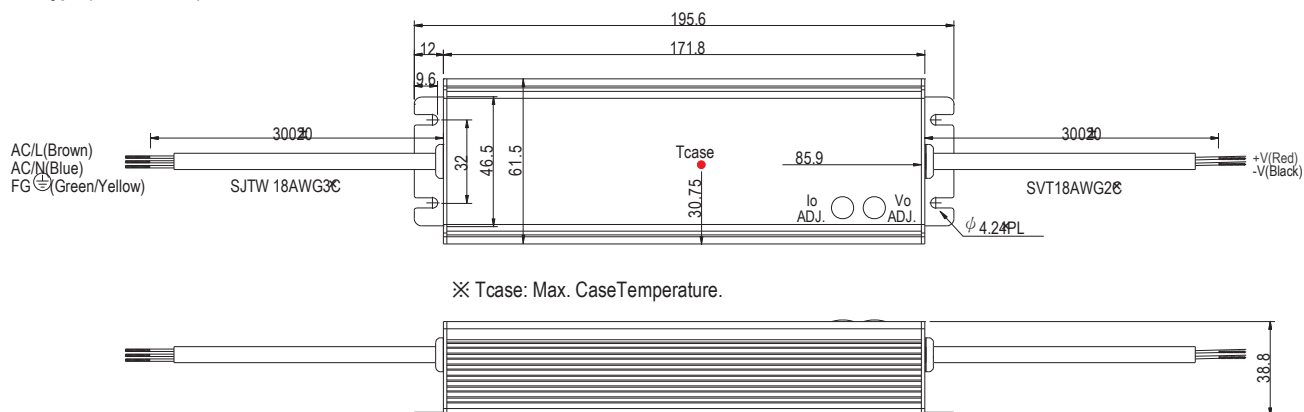


※ IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.
(Can access by removing the rubber stopper on the case.)

B Type:(HLG-80H-_B)

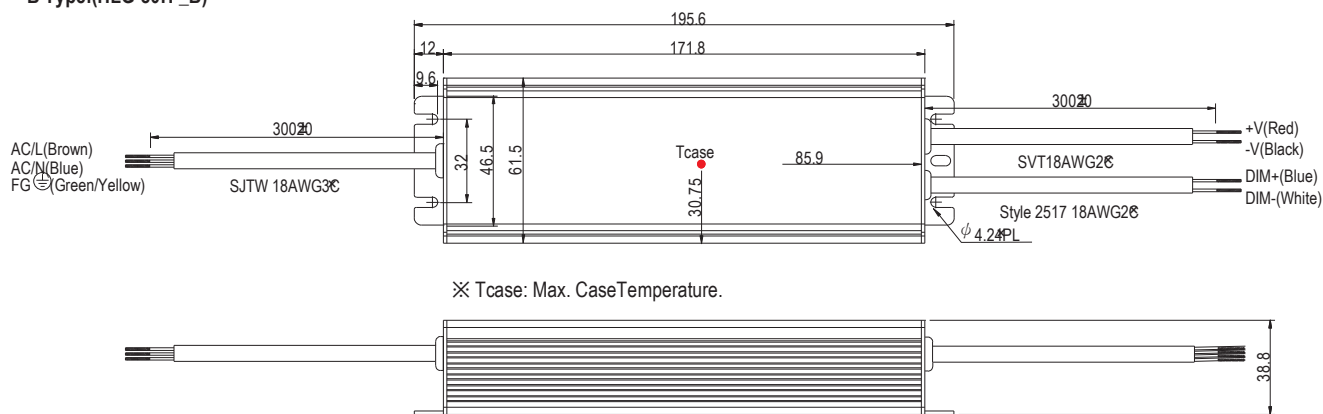


D Type(option): (HLG-80H-_D)

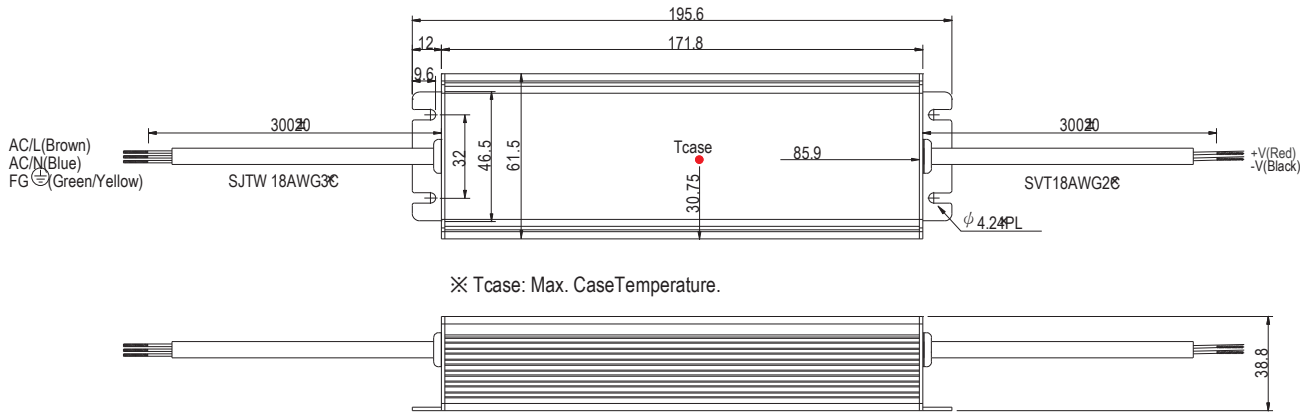


※ Tcase: Max. Case Temperature.

※ IP67 rated. Timer dimming function, contact MEAN WELL for details.


Block Diagram

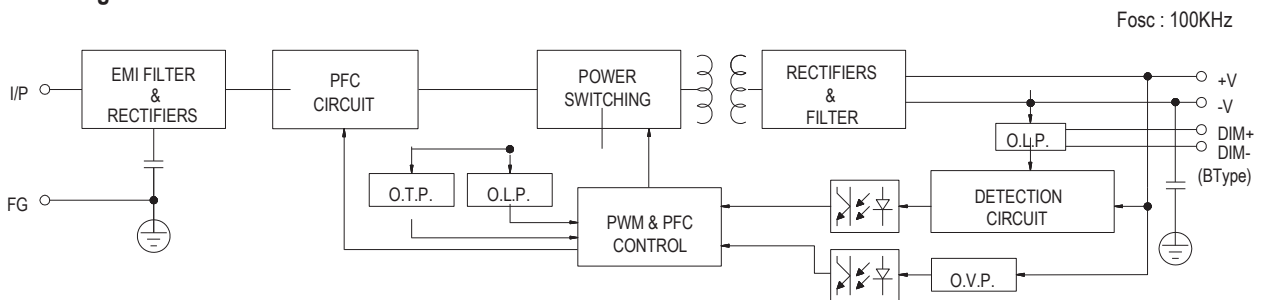


Derating Curve

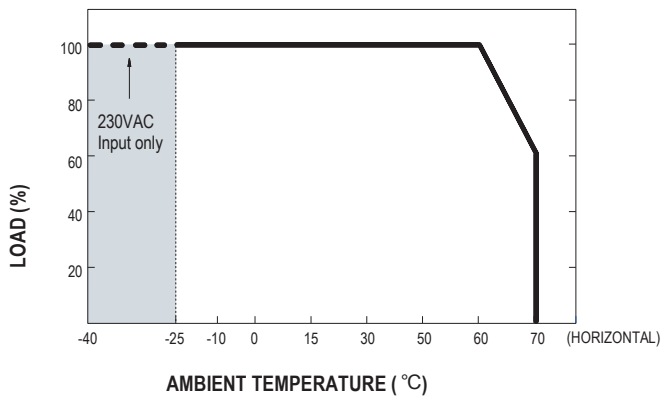

Static Characteristics

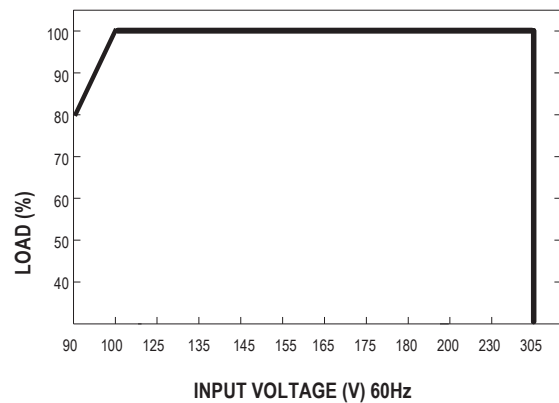


Power Factor Characteristic

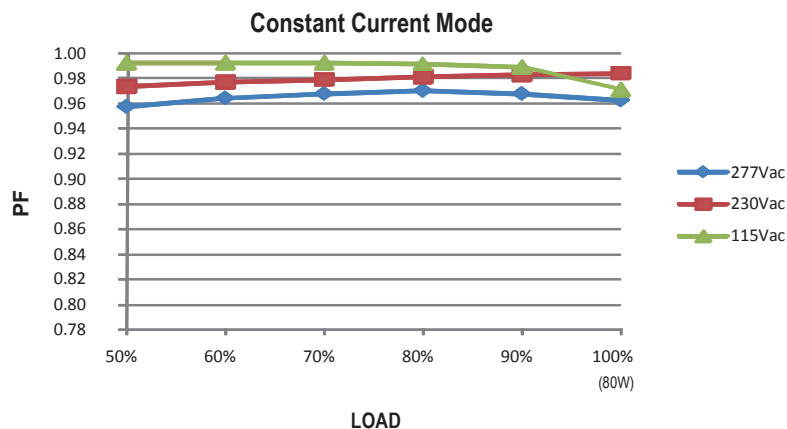

EFFICIENCY vs LOAD (48V Model)

HLG-80H series possess superior working efficiency that up to 91% can be reached in field applications.

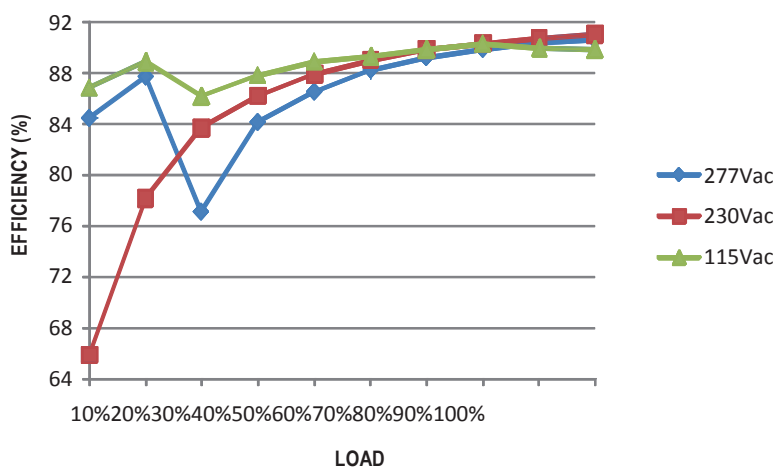


DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV)" or "constant current mode (CC)" to drive the LEDs.

MeanWell's LED power supply with CV+CC characteristic can be operated at both CV mode [with LED driver, at area (A)] and CC mode [direct drive, at area (B)].

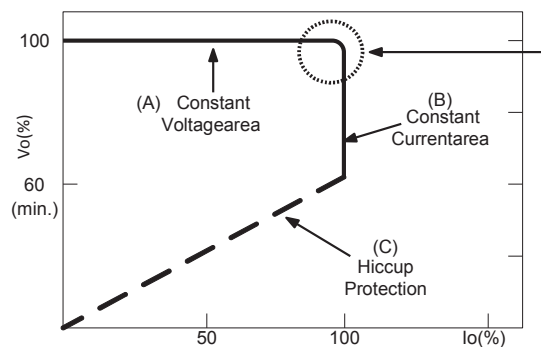


In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.

Typical LED power supply I-V curve

DIMMING OPERATION(for B-type only)

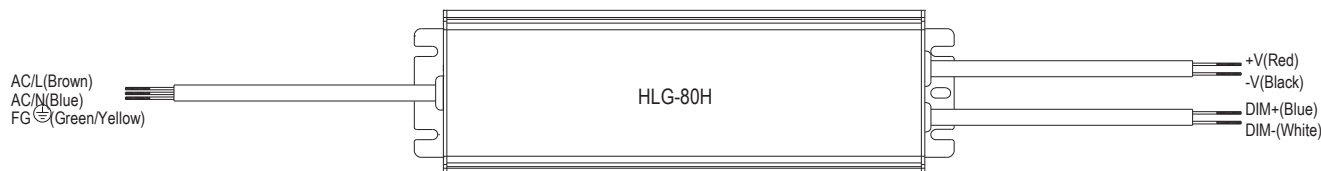

※ Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.

※ Please DO NOT connect "DIM-" to "-V".

※ Reference resistance value for output current adjustment (Typical)

Resistance value	Single driver	10KΩ	20KΩ	30KΩ	40KΩ	50KΩ	60KΩ	70KΩ	80KΩ	90KΩ	100KΩ	OPEN
	Multiple drivers (N=driver quantity for synchronization dimming operation)	40KΩ/N	20KΩ/N	30KΩ/N	40KΩ/N	50KΩ/N	60KΩ/N	70KΩ/N	80KΩ/N	90KΩ/N	100KΩ/N	-----
Percentage of rated current		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

※ 1 ~ 10V dimming function for output current adjustment (Typical)

Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%


※ 10V PWM signal for output current adjustment (Typical): Frequency range :100Hz ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

※ Using the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

※ Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.

Dimming connection diagram for turning the lighting fixture ON/OFF :

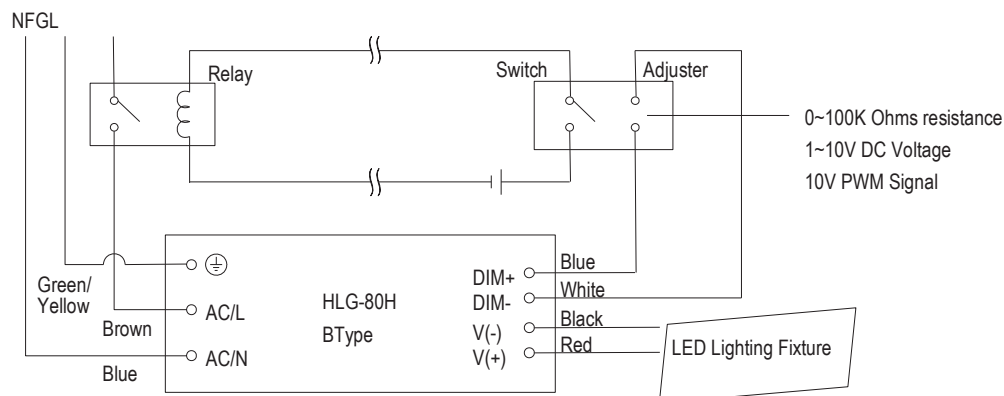

Using a switch and relay can turn ON/OFF the lighting fixture.


1. Output constant current level can be adjusted through output cable by connecting a
2. The LED lighting fixture can be turned ON/OFF by the switch.

resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.


■ WATERPROOF CONNECTION

◎ Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-80H to operate in dry/wet/damp or outdoor environment.

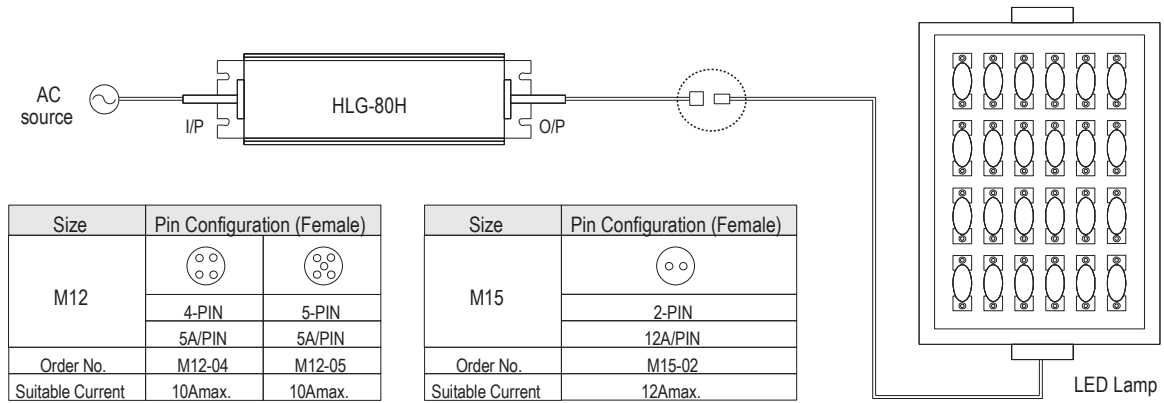


◎ Cable Joiner

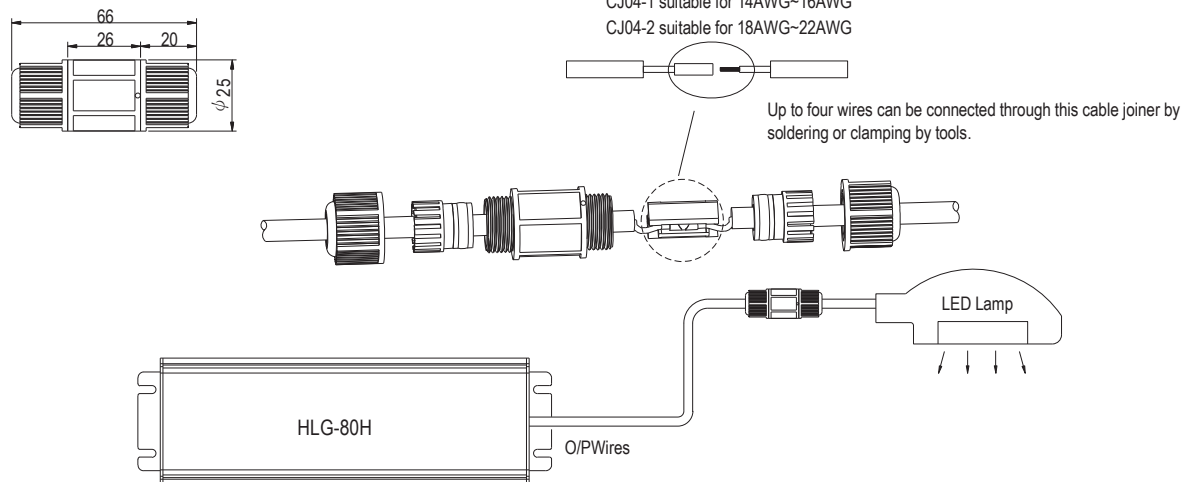

※CJ04 cable joiner can be purchased independently for user's own assembly.

MEAN WELL Order No. : CJ04-1, CJ04-2.

◎ Junction Box(Optional)

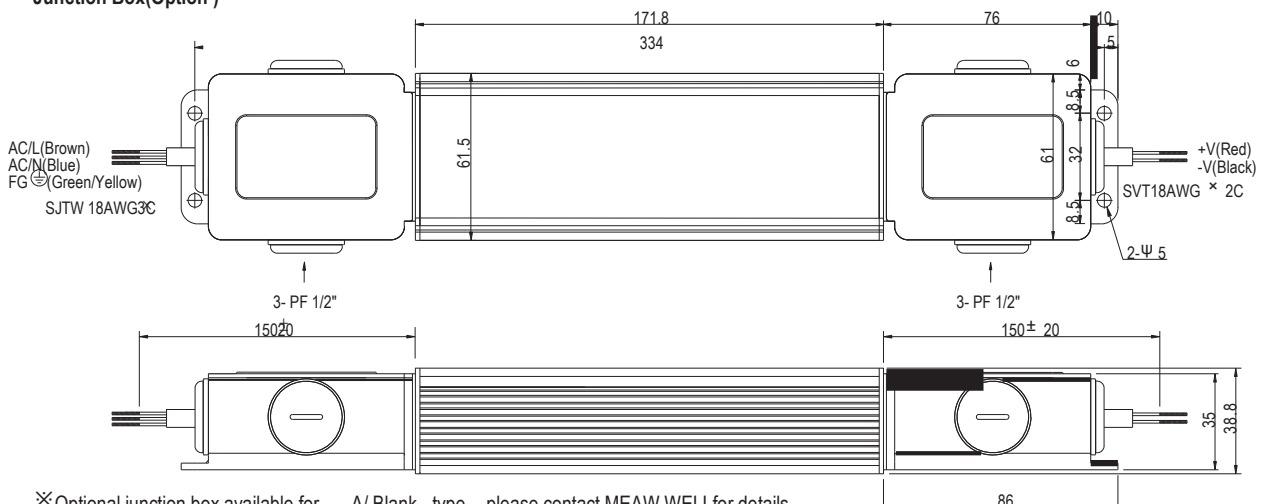

※Optional junction box available for A/Blank - type, please contact MEAW WELL for details.

※HLG-80H- ☐ BL models with junction box at both input and output side are listed(modified by B type only).