


2W LED Notbeleuchtung Neutral Weiß EN 60598-1 EN 60598-2-22 IP40 230V Anleitung


• Installation

Description of body and accessories

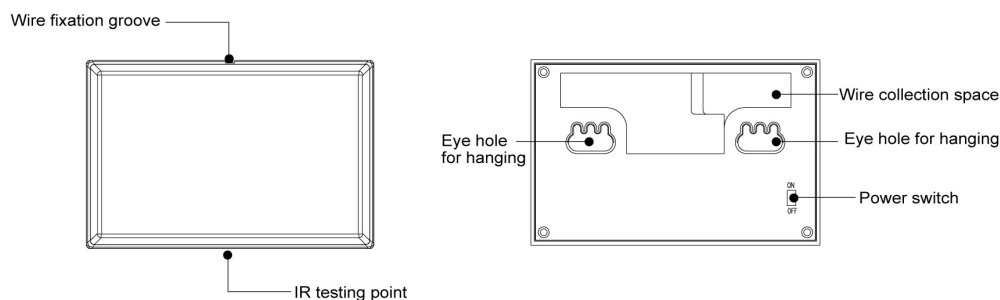


Installation: With power cord and plug


1. Fasten 2 screws in proper position on the wall. (Note: The distance of two screws should be about 99mm. Be sure the diameter of the screw is under 5mm.)



2. Estimate the distance between power cord plug and plug on the wall, stabilized the power cord into the groove.




3. Gather the extra wire into the collection space.

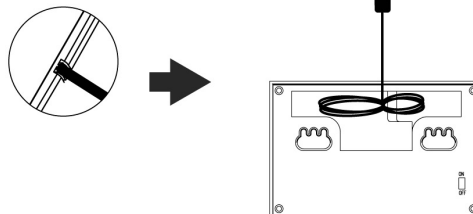


4. Before hanging up the fixture, turning the power switch to "ON" position.



5. Plug in the plug with AC power, and hanging the fixture smoothly fit to the wall.




6. Run IR testing process




Installation: Without Power cord

1. Embedded the box and fasten the crews or steel nails. (Note: The distance of two screws should be about 99mm. Be sure the diameter of the screw is under 5mm.)




2. Tight up the cables with electric tapes and put extras wires in the embedded box behind.



3. Turning the power switch to "ON" before hanging the fixture.



4. Run IR testing process



2W LED Notbeleuchtung Neutral Weiß
EN 60598-1 EN 60598-2-22 IP40 230V Anleitung



Notification of installation

1. Fixing the power cord with insulation tape properly, avoiding any over twisted or short-circuit of the cables.
2. Switch "ON" the power switch before hanging on the fixture.
3. Emergency light fixture will not shine while the AC power supply is connected to it and there is electricity supplied. If, it shines, please check out the power switch or contact the local supplier.
4. We can easily run the IR testing process after AC power supply is connected to the fixture.

• Operation Description

■ For the first operation

1. The power switch of the product will be at "OFF" position when goods shipped out from the factory. Before initial use, please turn on the power switch to "ON" position and charge the battery at least 24 hours.
2. Please install the product indoor or hanging from the eaves to avoid the moist from rain causing the damage of the product.

■ Maintenance Description

1. We suggest fully discharging the battery each 3 months for extending the life time of the battery inside..